

Mitutoyo



MEASURING INSTRUMENTS CATALOG





These marks indicate that a product has successfully passed IP65-level testing, which is carried out by the independent German certification organization TÜV Rheinland.



IP Codes (series 342-271-30, 342-371-30, 342-451-20)

Level 6: Dust-proof.


No ingress of dust allowed.

Level 5: Protected against water jets.


Water projected in jets against the enclosure from any direction shall have no harmful effects.




Anvil and spindle tip detail



342-271-30, 342-371-30, 112-401



342-451-20



142-402, 142-403

Technical Data

- Battery for series 342 SR44 (1 pc.), 938882, for initial operational checks (standard accessory)
- Battery life: Approx. 2.4 years under normal use (for series 342-271-30/342-371-30)
Approx. 5 years under normal use
- Length standard: Electromagnetic rotary sensor (for series 342-271-30/342-371-30)
Electrostatic capacity absolute sensor (for series 342-451-20)
- Standard accessories:
Spanner (301336), 1 pc. (except for series 342-451-20)

Optional Accessories

- Connecting cables (Digimatic model, Quickmike)
 - 1 m: 05CZA662
 - 2 m: 05CZA663
- USB Input Tool Direct
USB-ITN-B (2 m): 06AFM380B
- U-WAVE-T dedicated connection cable
(for series 342-271-30/342-371-30 and 342-451-20)
160 mm: 02AZD790B
For foot switch: 02AZE140B

Wireless Data Output* U-WAVE™

- U-WAVE-TM 264-622 (IP67 type)
264-623 (Buzzer type)
- U-WAVE-TMB Transmitter
Mitutoyo Bluetooth® U-WAVE
264-626 (IP type)
264-627 (Buzzer type)
Refer to page A-16 for details.
- Connecting unit for U-WAVE-TM/TMB
02AZF310 (IP67/buzzer type common specification)
Refer to pages A-16 and A-18 for details.
* 342-271-30 and 342-371-30 can be attached. Not available for 342-451-20.

Crimp Height Micrometers Series 342,112,142

- Measures the height of crimp contacts.
- Equipped with Ratchet Stop for constant measuring force.
- IP65 water/dust protection (Digimatic model).

- Model 342-451-20 is a Quickmike type model with spindle feed of 10 mm per thimble rotation.



Digimatic (LCD)
342-271-30



Quickmike type (LCD)
342-451-20



ABSOLUTE™



112-401

SPECIFICATIONS


Metric			
Order No.	Range (mm)	Resolution (mm)	Maximum permissible error JMF (μm)
Digimatic (LCD)			
342-271-30	0 - 20	0.001	±3
Quickmike (LCD)			
342-451-20	0 - 15	0.001	±3


Metric			
Order No.	Range (mm)	Graduation (mm)	Maximum permissible error JMF (μm)
Mechanical counter model			
142-402	0 - 25	0.01	±3
142-403		0.001	

Metric			
Order No.	Range (mm)	Graduation (mm)	Maximum permissible error JMF (μm)
Analog			
112-401	0 - 25	0.01	±3

Inch / Metric			
Order No.	Range (in)	Resolution	Maximum permissible error JMF (in)
Digimatic (LCD)			
342-371-30	0 - 0.8	0.00005 in / 0.001 mm	±0.00015

DIMENSIONS

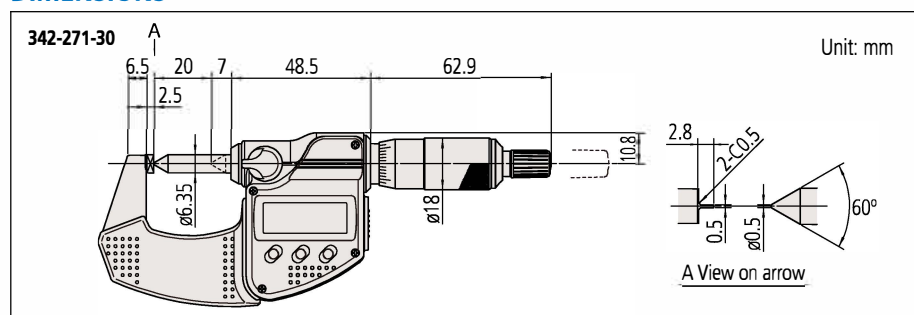

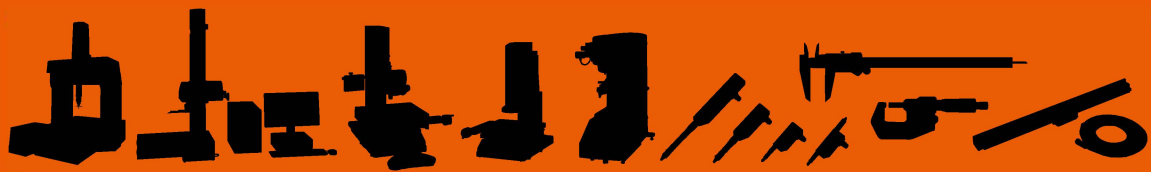

FOR MORE INFORMATION PLEASE CONTACT:



BHAGWATI

Hardware & Mill Store Since 1976

Address: 4769, 1ST Floor, Old Post Office Building,
Hauz Qazi, Delhi - 110006

Mobile: 9212012856, 9350076343

Website: www.bhagwathardware.com
www.bhagwathardwaredelhi.in

E-mail: sandeep@bhagwatimail.com

AN ISO 9001 : 2015 CERTIFIED COMPANY