



2025.10

Reference Guide

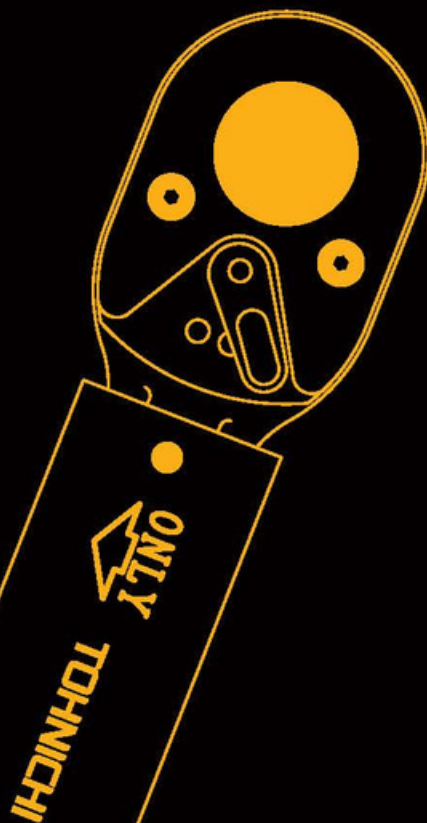

FOR MORE INFORMATION PLEASE CONTACT:

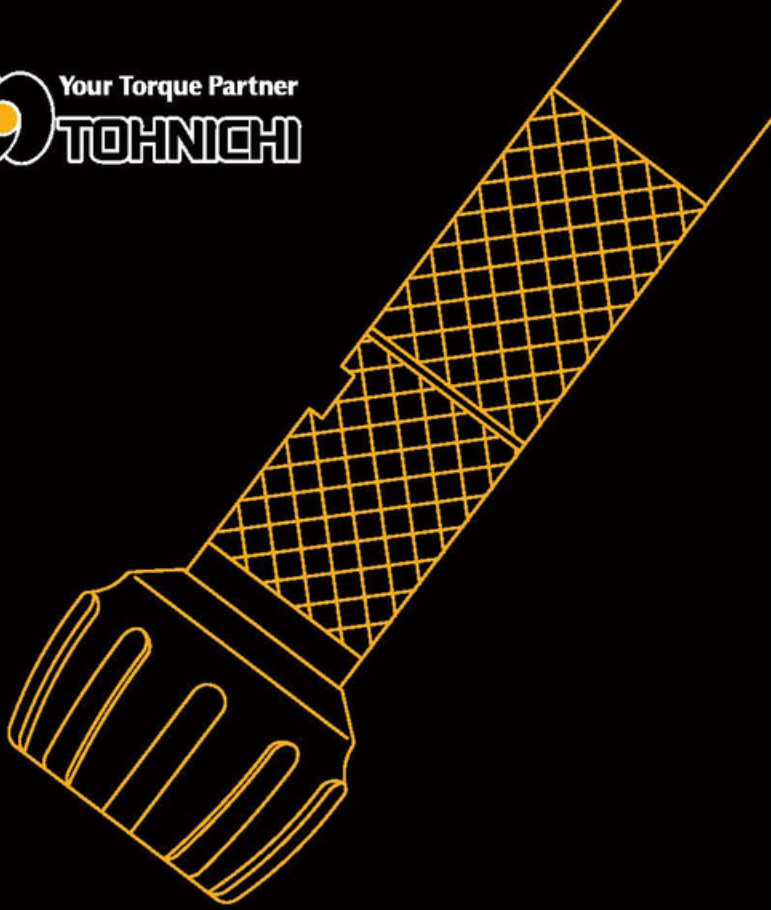

BHAGWATI
Hardware & Mill Store Since 1976

Address: 4769, 1ST Floor, Old Post Office Building,
Hauz Qazi, Delhi - 110006

Mobile: 9212012856, 9350076343

Website: www.bhagwatihardware.com
www.bhagwatihardwaredelhi.in

E-mail: sandeep@bhagwatimail.com

AN ISO 9001 : 2015 CERTIFIED COMPANY

A4/A3/AC3

Direction **RoHS** Semi-Automatic Airtork




A25N4 Low provisional type



A50N3 Low provisional type



AC50N3 High provisional type

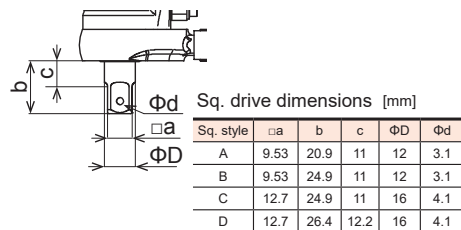

ACLS50N3 High provisional with limit switch type

Assembly Angle Pneumatic Graduation Push button ISO6789:2017

- High speed and high precision bolt tightening by an integrated air motor and torque wrench
- A4 is 40% lighter and 6-7 cm smaller than the previous A3 model
- A3: Low provisional torque type, AC3: High provisional torque type

S.I. Model	Torque Range [N·m]		Metric Model	Torque Range [kgf·cm]		American Model	Torque Range [lbf·in/lbf·ft]		Provisional Tightening Torque [N·m]	Free Speed [r.p.m]	Air Pressure [MPa]	Hose Dia. [mm]	Overall Length [mm]	Sq. Drive [mm]	Sq. Style	Weight [kg]
	Min.-Max.	Grad.		Min.-Max.	Grad.		Min.-Max.	Grad.								
A10N4	2-10	0.1	A100M4	20-100	1	A100I4-3/8	20-100	1			0.5		204			0.59
A25N4	5-25	0.25	A250M4	50-250	2.5	A200I4-3/8	50-200	2.5	1.8	750		φ5	217		A	0.61
A50N3	10-50	0.5	A500M3	100-500	5	A400I3-3/8	100-400	5					277	9.53		1.0
-	-	-	-	-	-	A800I3-3/8	200-800	10							B	1.4
-	-	-	-	-	-	A75F3-3/8	15-75	1	2.5	800		φ6	338			
A100N3	20-100	1	A1000M3	200-1000	10	-	-	-							C	
A180N3	40-180	2	A1800M3	400-1800	20	A130F3-1/2	30-130	2	5				487		D	2.6
AC25N3	5-25	0.25	AC250M3	50-250	2.5	AC200I3-3/8	50-200	2.5			0.6					
AC50N3	10-50	0.5	AC500M3	100-500	5	AC400I3-3/8	100-400	5	11	1000		φ5	293		A	1.5
-	-	-	-	-	-	AC800I3-3/8	200-800	10						9.53		
-	-	-	-	-	-	AC75F3-3/8	15-75	1	17.5	900		φ6	334		B	2.0
AC100N3	20-100	1	AC1000M3	200-1000	10	-	-	-							C	
AC180N3	40-180	2	AC1800M3	400-1800	20	AC130F3-1/2	30-130	2	19	800			489	12.7	D	3.3

Note

1. Provisional tightening torque is not warranty the accuracy.
2. Use pneumatic sockets only.
3. Through hole type square drive.
4. A4 and ALS4 models are not certified CE.

A4LS/A3LS/AC3LS

- A4/A3/AC3 style with limit switch output
- Wired Error-Proofing, Pokayoke, system for assembly processes

S.I. Model	Torque Range [N·m]		Metric Model	Torque Range [kgf·cm]		American Model	Torque Range [lbf·in/lbf·ft]		Provisional Tightening Torque [N·m]	Free Speed [r.p.m]	Overall Length [mm]	Square Drive [mm]	Weight [kg]
	Min.-Max.	Grad.		Min.-Max.	Grad.		Min.-Max.	Grad.					
ALS10N4	2-10	0.1	ALS100M4	20-100	1	ALS100I4-3/8	20-100	1			204		0.71
ALS25N4	5-25	0.25	ALS250M4	50-250	2.5	ALS200I4-3/8	50-200	2.5	1.8	750		217	0.77
ALS50N3	10-50	0.5	ALS500M3	100-500	5	ALS400I3-3/8	100-400	5			277		1.2
ACLS25N3	5-25	0.25	ACLS250M3	50-250	2.5	ACLS200I3-3/8	50-200	2.5				9.53	1.5
ACLS50N3	10-50	0.5	ACLS500M3	100-500	5	ACLS400I3-3/8	100-400	5	11	1000			
-	-	-	-	-	-	ACLS800I3-3/8	200-800	10					
-	-	-	-	-	-	ACLS75F3-3/8	15-75	1	17.5	900		334	2.2
ACLS100N3	20-100	1	ACLS1000M3	200-1000	10	-	-	-					
ACLS180N3	40-180	2	ACLS1800M3	400-1800	20	ACLS130F3-1/2	30-130	2	19	800		488	3.5

AUR-mk2

UNITORK/Pistol Type Pneumatic Torque Screwdriver

Direction **RoHS**



RoHS



AUR25N-mk2

Assembly Pistol Pneumatic Graduation Trigger

- High speed and high accuracy tightening
- Easy torque adjustment by scale with key

S.I. Model	Torque Range [N·m]		Metric Model	Torque Range [kgf·cm]		American Model	Torque Range [lbf·in]		Free Speed [r.p.m]	Air Pressure [MPa]	Hose in Dia. [mm]	Standard Accessory Bit Ⓢ	Weight [kg]
	Min.-Max.	Grad.		Min.-Max.	Grad.		Min.-Max.	Grad.					
AUR5N-mk2	2-5	0.1	AU50R-mk2	20-50	1	AU50R-A-mk2	15-45	1	2100			#3	1.5
AUR12.5N-mk2	5-12.5	0.25	AU125R-mk2	50-125	2.5	AU125R-A-mk2	37.5-112.5	2.5	800	0.5	φ10	-	1.7
AUR25N-mk2	10-25	0.5	AU250R-mk2	100-250	5	AU250R-A-mk2	75-225	5	400			-	

Note

1. AUR5N-mk2 has #3 bit, 6.35 HEX, with a double bit. Any other bits are available in the local market.
2. AUR12.5N-mk2 and AUR25N-mk2 have a fixed 9.53mm square drive. Use pneumatic sockets only.

Standard Accessories

1. Torque adjusting key
2. Supportive Handle for AUR25N-mk2/AURLS25N-mk2
3. W12 Open ended spanner for AUR25N-mk2/AURLS25N-mk2
4. Counter clockwise rotation has no torque control and it is loosening purpose only.

AURLS-mk2

- AUR-mk2 style with limit switch output
- Wired Error-Proofing, Pokayoke, system for assembly processes

S.I. Model	Torque Range [N·m]		Metric Model	Torque Range [kgf·cm]		American Model	Torque Range [lbf·in]		Free Speed [r.p.m]	Air Pressure [MPa]	Hose in Dia. [mm]	Standard Accessory Bit Ⓢ	Weight [kg]
	Min.-Max.	Grad.		Min.-Max.	Grad.		Min.-Max.	Grad.					
AURLS5N-mk2	2-5	0.1	AU50RLS-mk2	20-50	1	AU50RLS-A-mk2	15-45	1	2100			#3	1.5
AURLS12.5N-mk2	5-12.5	0.25	AU125RLS-mk2	50-125	2.5	AU125RLS-A-mk2	37.5-112.5	2.5	800	0.5	φ10	-	1.7
AURLS25N-mk2	10-25	0.5	AU250RLS-mk2	100-250	5	AU250RLS-A-mk2	75-225	5	400			-	

POKA Patrol, Count Checker
CNA-4mk3



2025.10

Reference Guide



FOR MORE INFORMATION PLEASE CONTACT:



BHAGWATI

Hardware & Mill Store Since 1976

Address: 4769, 1ST Floor, Old Post Office Building,
Hauz Qazi, Delhi - 110006

Mobile: 9212012856, 9350076343

Website: www.bhagwathardware.com
www.bhagwathardwaredelhi.in

E-mail: sandeep@bhagwatimail.com

AN ISO 9001 : 2015 CERTIFIED COMPANY